

Stained Glass Love Letters

Supply List

Sewing Machine
#60/8 sewing machine needles
Pins
cutting bias tape!!
Paper Scissors
Rotary Cutting Equipment

#2 Pencil - or Sharpie Ultrafine Marker
Sewing Awl
Small Sharp Scissors - very helpful when

Fabric Scissors
Safety Pins - or Sulky KK2000 basting spray


Freezer Paper 12" x 10"
Woven Fusible Interfacing 11" x 9"

Roxanne's Glue Baste It
Cotton Batting 14" x 16"

Fabric **Prewashed and Pressed - DO NOT USE SPRAY STARCH**

Please prewash all fabrics before class. Fusible products may not adhere to unwashed fabric!!

Leaves	4 ½" x 6 ½"
Center Yellow	2" square
Petals	4" x 6"
Background	6" x 13"
Heart	6" x 8"
Border	¼ yard
Binding (black)	¼ yard
Backing (black)	fat quarter
Fusible bias tape	3 yards

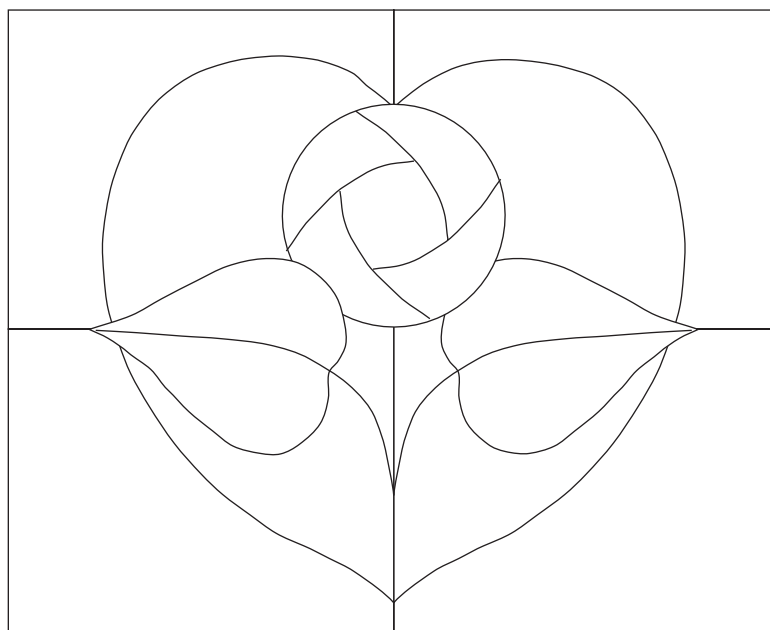


Bear Paw Productions

PO Box 230589 • Anchorage, AK 99523-0589

Phone (907) 349-7873 • FAX (907) 349-7875

www.bearpawproductions.com

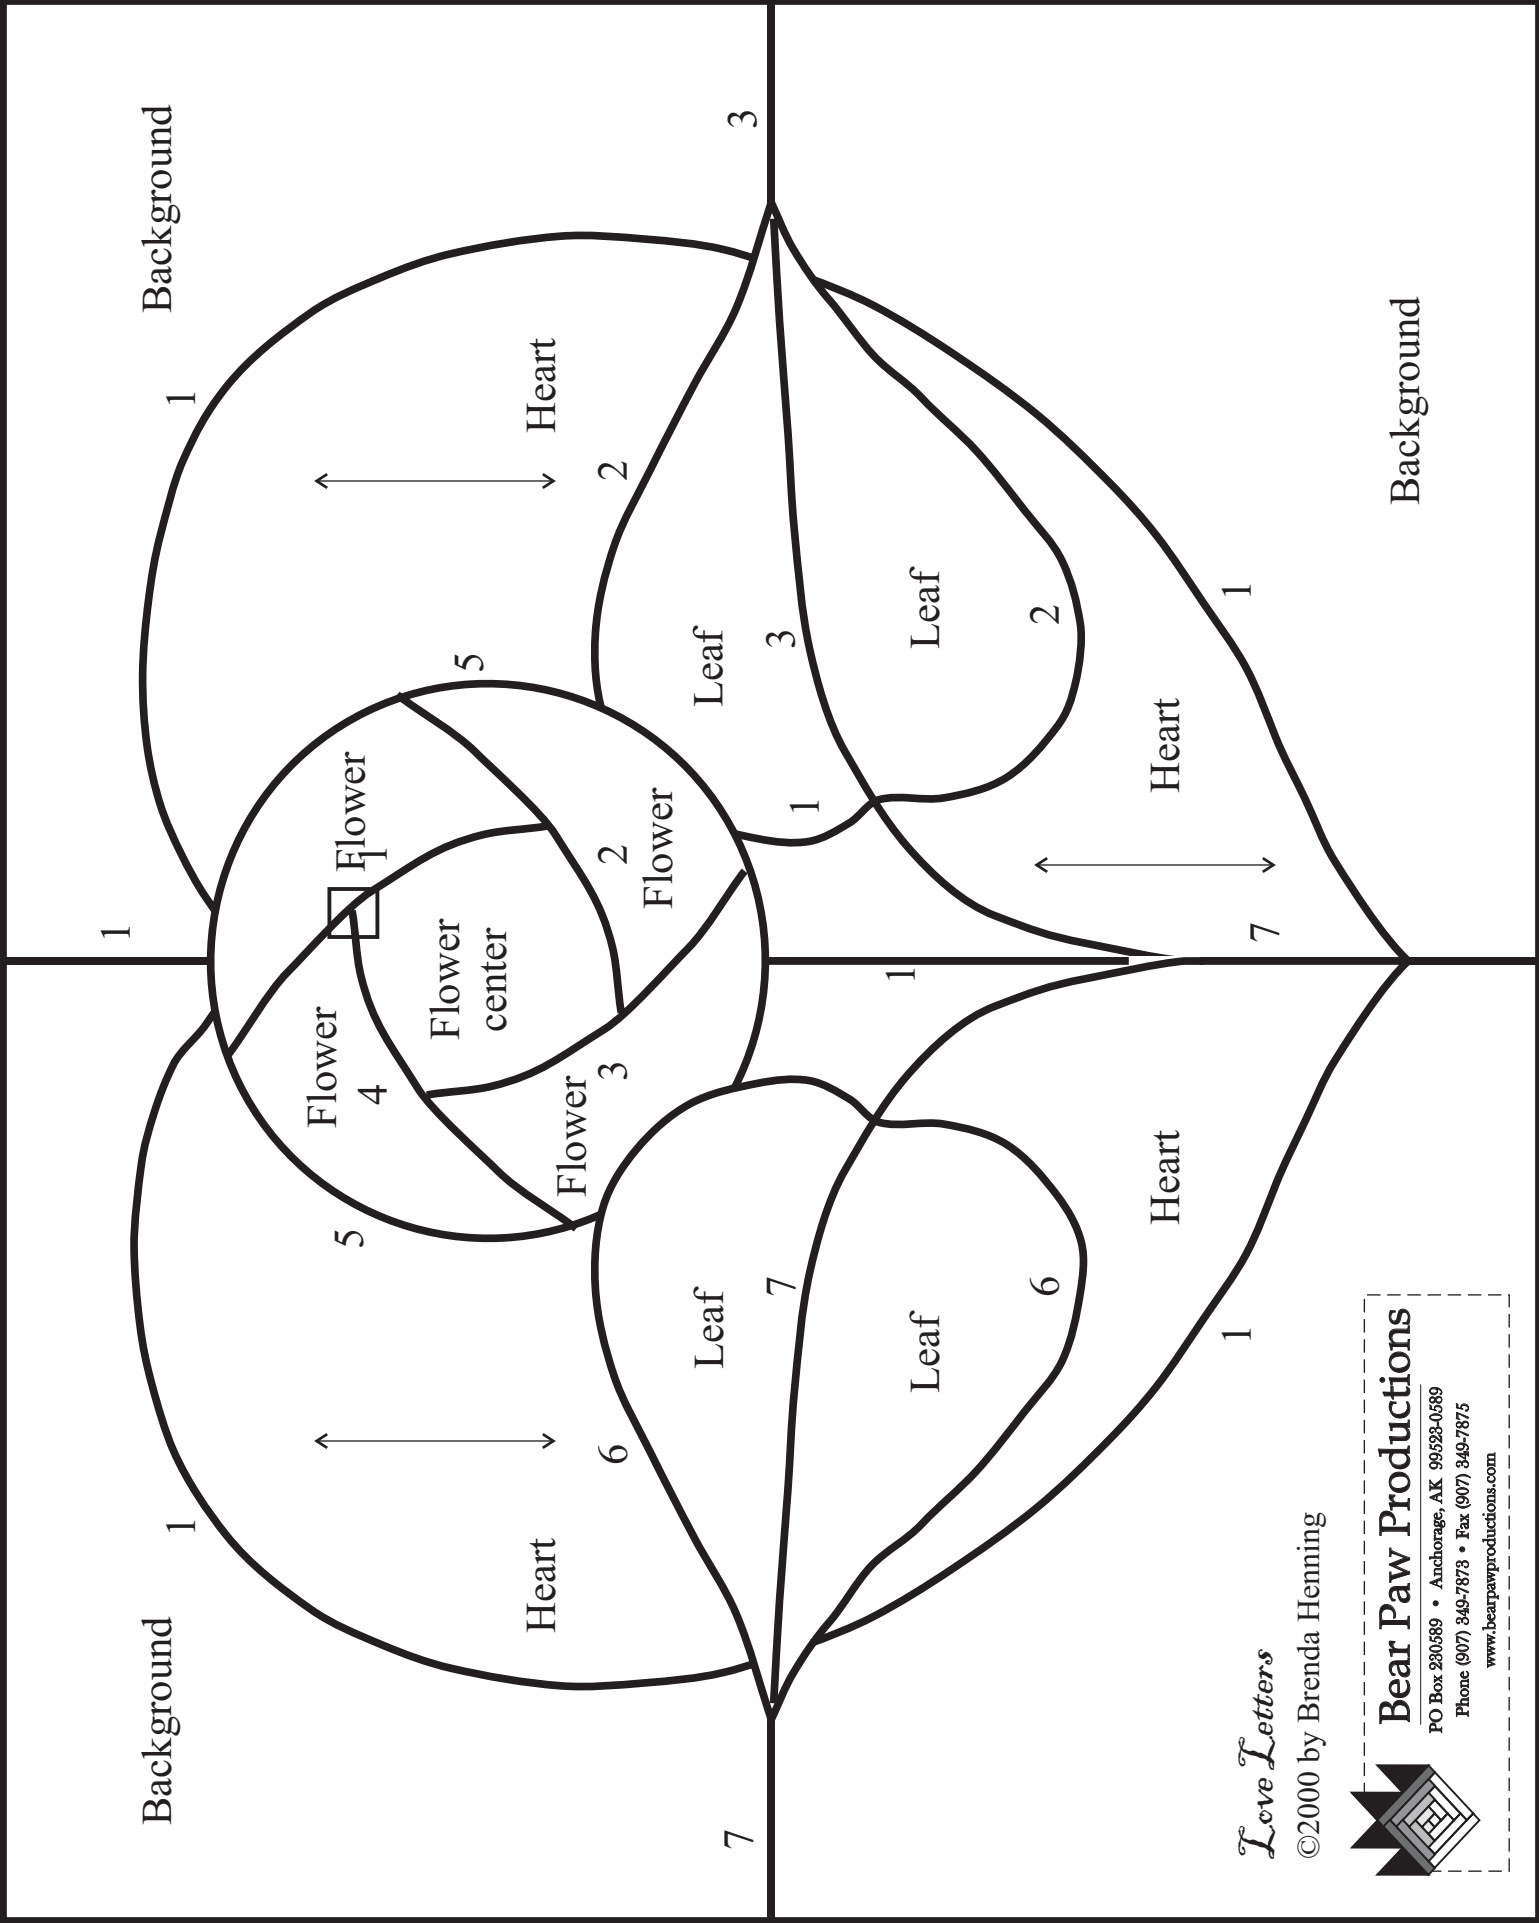

Love Letters

©2000 by Brenda Henning



Bear Paw Productions

PO Box 280689 • Anchorage, AK 99528-0689
Phone (907) 849-7873 • Fax (907) 849-7875
www.bearpawproductions.com

Stained Glass Love Letters

Stained Glass Quilt Instructions

- 1 Center and trace the design on the adhesive (rough) side of the fusible interfacing using a ultra-fine point Sharpie pen.
- 2 Center and trace the design on the paper side of the freezer paper.
- 3 Cut the freezer paper pattern into templates. * Cut directly on the drawn lines. If you are using a fabric with a directional print, you may choose to draw arrows to indicate the direction of the print. * Pieces that are of the same fabric, and side by side may be cut as one piece of fabric... Such as the leaves.
- 4 Place the cut freezer paper pieces on the right side of the chosen design fabric - shiny side down. Press the freezer paper templates in place with a warm iron.
- 5 Cut the fabric pieces out 1/16" away from the edge of the paper template.
- 6 Position the fabric pieces on to the fusible side of the interfacing and press the fabrics in place. Use an applique press sheet to protect the sole of the iron from any exposed adhesive. Fabric pieces should overlap slightly.
- 7 Press the fusible bias tape in place. If any areas do not remain adhered, use a little dab of Roxanne's Glue Baste It to hold the layers in place. Be sure to follow the sequence of bias tape placement on the pattern.
- 8 Trim the design to 8" x 10".
- 9 Cut strips of border fabric as follows:
 - 2 strips 2 1/2" x 8"
 - 2 strips 2 1/2" x 14"
- 10 Apply the borders to the design block using a 1/4" seam allowance. Press the seams toward the border strips.
- 11 Layer the quilt top with batting and backing. Stitch the bias tape in place along both edges. Stipple quilt the border if desired. Trim the excess batting and backing to the edge of the design.
- 12 Bind the quilt to finish

